

BI series

Linux capable application cores



BI-350

RV32IMAC[F]

32-bit
Tiny Linux capable
core targeting
IoT applications

Compares with
ARM A5, A7

BI-651

RV64GC

64-bit
Linux capable
core targeting
high performance in
power constrained
environment

Compares with
ARM A53, A55

BI-671


RV64GC

64-bit
Mid-range
application core for
maximum single
thread performance

Compares with
MIPS P5600

BM-310

Embedded microcontroller core

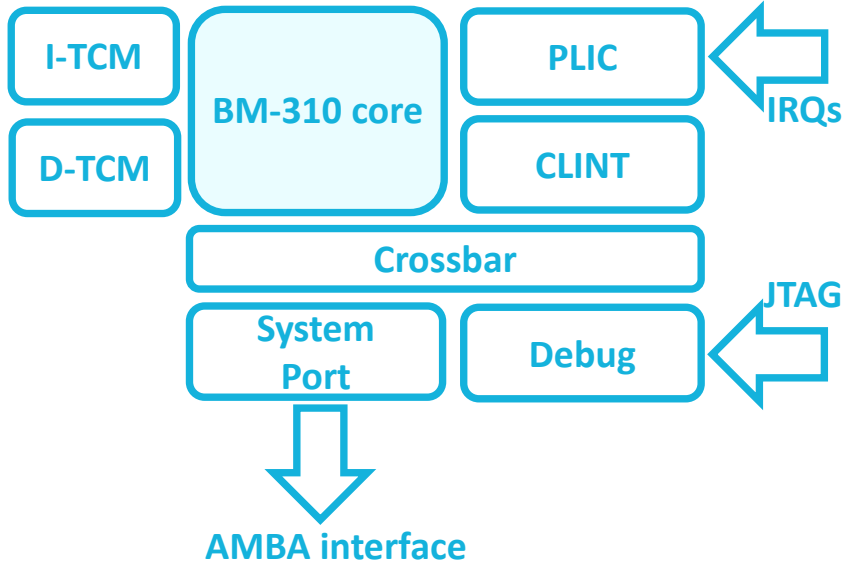

Open-source

Digilent JTAG-HS3



LAUTERBACH
DEVELOPMENT TOOLS

